

# VP DAYLIGHTING

## STYLE

### TRANSLUCENT ROOF TUF-LITES

## FEATURES

THE ECONOMICAL CHOICE WHEN BUILDING  
PLANS CALL FOR ROOF DAYLIGHTING OPTIONS



- Tuf-Lite panels are an integrated, weathertight part of the roofing system
- Panels are economical, tough and provide long service life.
- Tuf-lite panels provide natural interior light.
- Available in 3 profiles, fire retardant or regular, with or without condensation pans

**T**ranslucent Tuf-Lites provide natural diffused light for brighter working conditions with the potential to save energy and lighting costs. Tuf-lites are available in SSR and Panel Rib roof profiles. The SLR Tuf-lite is built into an SLR panel.



# TUF-LITE PANELS ALLOW ECONOMICAL DAYLIGHTING OPTIONS FOR YOUR VP BUILDING.

## TRANSLUCENT TUF-LITE PANELS

Tuf-Lite panels are made of translucent fiberglass reinforced acrylic modified polyester which provides soft, diffused natural light for your building. These are more economical than regular skylights or windows because they are incorporated into the roof panels of the building. Light transmission is 60%.

Optional condensation pans are available for skylights. The SLR Tuf-Lite features a textured white polymer sheet incorporated into an SLR metal panel for ease of installation. The SSR Tuf-Lite features metal rails for seaming. Daylight panels are available in optional fire retardant material. The fire retardant panels are UL 25 flame spread rated.

### DAYLIGHTING OPTIONS FOR ROOF SYSTEMS

Panel Rib Roof Tuf-Lites are white translucent GFRP panels manufactured in Panel Rib roof profile. Standard length is 10'-4". Panel Rib Tuf-Lites are available with UL Class 90 wind load uplift rating. SSR Roof System Tuf-Lites are white translucent panels manufactured in SSR roof profile and assembled with metal rails which allows the panel to be seamed into the roof. Standard panel length is 10'-4". Rails are available in one standard color – Egyptian White. SSR panels are available with stiffener channels to achieve a UL Class 90 wind uplift rating.


SLR Roof System Tuf-Lites are white translucent acrylic inserts manufactured to fit within VP's SLR roof panels. Standard panel length is 10'-4". SLR Tuf-Lite panels match the color of the other SLR panels in your roof system.

### OTHER DAYLIGHTING OPTIONS

VP also offers Tuf-Dome for SSR roof systems. Ask for info sheet #2095. VP's Wallite information sheet is #2083. Wallites are available in Panel Rib or Vee Rib profiles in standard lengths of 5'-3" as well as custom lengths.






SSR TUF-LITE IS A GFRP PANEL WITH METAL RAILS THAT SEAMS INTO METAL SSR PANELS

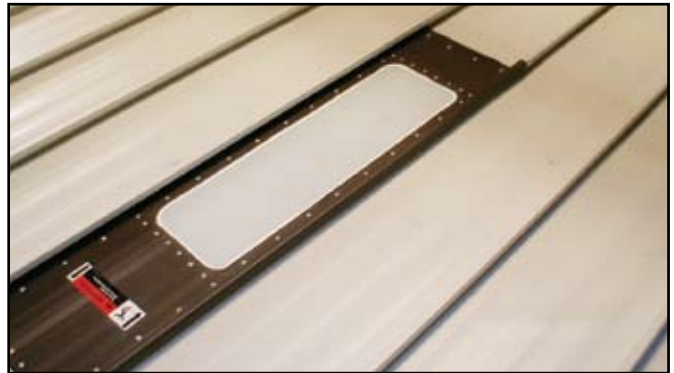

THE SLR TUF-LITE IS EMBEDDED IN A METAL PANEL, SHOWN HERE AS A CONTRASTED COLOR FOR ILLUSTRATION PURPOSES. SLR TUF-LITES WILL MATCH THE CHOSEN ROOF COLOR.

## FEATURES

- Natural lighting saves energy
- 60% light transmission
- Corrosion, chemical and weather resistant
- ICC-ES legacy reports SSR & Panel Rib ER-5048 SLR = ER-1264
- Class 1 fire rated available (UL 25)
- Meets ASTM D 3841

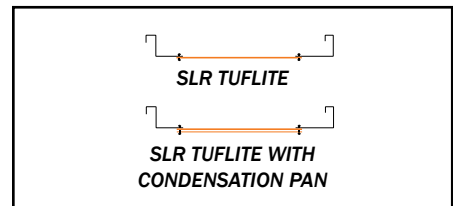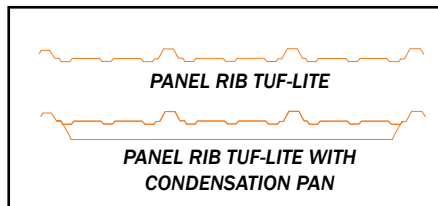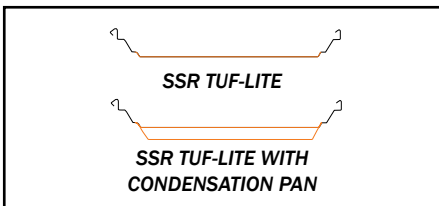

The Ultimate Building Solution  
 VP Buildings  
 3200 Players Club Circle  
 Memphis, TN 38125  
 1-800-238-3246 • www.vp.com  
 2081 Revised 11/06



QUALITY CERTIFICATION  
 METAL BUILDINGS