



V A R C O P R U D E N B U I L D I N G S

DECK-LINER™ PANEL



LINERS & SOFFIT SYSTEMS

FEATURES

- Easy installation with self-drilling fasteners
- Panels coverage is 36" with lengths from 5' to 41'-8"
- 1/2" depth corrugated panel available in four gauges.
- Finish options include acrylic coated Galvalume® finish for 22, 24, 26 & 28 ga., polyester white for 22 & 28 ga. and KXL colors for 24 & 26 ga.
- Corrugations are spaced at 3" on center

BENEFITS

- A multi-purpose panel, ideal as a ceiling liner, mezzanine deck, interior wall liner, or as part of a composite roof system
- Economical choice for an attractive interior panel appearance
- Provides an insulation barrier for better thermal performance



DECK-LINER™ PANEL

Economical liner panel choice for roof and walls

This multi-purpose panel is a low-cost alternative for most interior liner applications. Deck-Liner has a 36" coverage with a 1/2" high corrugated rib profile. These panels are available in multiple gauges and lengths up to 41'-8". Finish options include AZ50 in polyester white or AZ55 acrylic coated Galvalume® finish for 28 and 22 gauge panels. 26 and 24 gauge panels are available in AZ55 acrylic coated Galvalume® or AZ50 in standard KXL colors.

The KXL paint system is a PVDF finish applied to the Galvalume® surface to give a long-life color that resists fading and chalking backed by 25 year finish warranty. KXL is a 1 mil nom. PVDF finish with 70% Kynar® 500 or Hylar® 5000 standard. For color choices, see #6021 Varco Pruden Standard Wall, Trim and Roof Colors selection card. Custom colors are available. Color options are subject to change without notice.

Use Deck-Liner as a base layer over purlins or joist when designing a composite roof system to provide additional thermal protection and an attractive ceiling. Also, Deck-Liner can be used as an economical option for interior walls and roof liners. In mezzanine applications, Deck-Liner serves as an inexpensive decking base.

The all-steel panels attach directly to purlin and girt secondaries with self-drilling fasteners. Once installed, these panels require little or no maintenance and deliver years of trouble-free service.

Panel Width: 36" coverage
Panel Length: Min. 2' Max. 41'8"
Gauges: 22, 24, 26, 28 ga. available
Substrate: AZ50 painted or AZ55 for Galvalume
Exterior Coating: KXL (70% PVDF)
Interior Coating: Gray primer
Ext. Coat Warranty: 25 yrs. conditional†
Finish: Smooth
Profile: Ribbed

Deck-Liner panel is available with trim options to provide a finished look to your building interior. For information about this or any other VP product or service, contact your local authorized VP Builder.

Note: All panels formed from light gauge metal may exhibit waviness, also known as "Oil Canning," commonly occurring in, but not restricted to, flat portions of a panel. This inherent characteristic is not a defect of material or manufacturing and is not cause for rejection.


70% PVDF finishes meet both Kynar 500 and Hylar 5000 specifications.

- Kynar 500® is a registered trademark of Arkema.
- Hylar 5000® is a registered trademark of Solvay Solexis.
- Galvalume® is a registered trademark of BIEC International, Inc.



Deck-Liner as part of SLR Thermo-Deck Roof System

DECK-LINER PROFILE

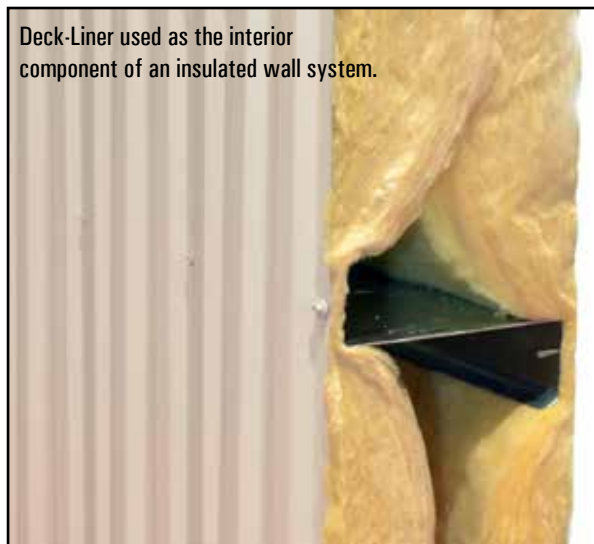

Deck-Liner used as the interior component of an insulated wall system.



Varco Pruden Buildings, 3200 Players Club Circle, Memphis, TN 38125

© BlueScope Buildings North America, Inc. All rights reserved. Varco Pruden Buildings® is a division of BlueScope Buildings North America, Inc. Varco Pruden meets or exceeds the most comprehensive testing and compliance standards in the building system industry. To learn more about our products, services and qualifications, visit our website, www.vp.com.

2091 Deck-Liner Panel
Issue Date: 2009
Revised: 11/13