



V A R C O P R U D E N B U I L D I N G S

## VEE RIB™ WALL PANEL

WALL SYSTEMS



### FEATURES

- Available in 26 or 24 gauge
- 36 " wide panel with 1-3/16" recessed ribs 12" on center
- Available up to 48' in length\*
- Variety of color options with KXL finish and a 25 year paint warranty
- Installed with stainless steel capped self-drilling color-matched fasteners
- Fasteners installed in V-groove
- Embossed surface

*\*Max. length varies by manufacturing location*

### BENEFITS

- Variety of gauge thicknesses to meet most codes and specifications
- Engineered for durability and aesthetically pleasing
- Long panel lengths minimize end laps for optimum wall integrity
- Superior paint finishes reduces maintenance costs
- Recessed fastener locations give the panel a semi-concealed profile with bold architectural lines
- Embossed surface provides attractive architectural finish



# VEE RIB WALL PANEL

The sculptured look of Vee Rib can add visual interest to any building

Vee Rib is an economical wall system with a distinct sculptured look. This wall system can provide a more architectural approach than concrete, masonry or even wood alternatives.

Vee Rib wall panels are standard 26 gauge AZ50 steel or optional 24 gauge. The panel is 36" wide with a V-groove pattern creating 1-3/16" reveals. It is available in lengths up to 48' which can provide a continuous panel from foundation to eave. This can eliminate the need for endlaps and assures you of wall integrity and weathertightness.

Vee Rib also comes with special base trim for the foundation to assure a weathertight seal. Vee Rib panels are attached with stainless steel capped self-drilling, color matched fasteners that are semi-concealed in the bottom of the V-groove. The panel's surface is embossed for increased aesthetics and to reduce glare.

Vee Rib can effectively utilize up to 6" of blanket insulation as well as up to 2-1/2" of rigid board insulation. Your VP Builder can assist you in selecting the optimal insulation approach, considering up-front costs and long term energy savings.

All gauges of Vee Rib are available in a selection of standard KXL finish and colors. The KXL paint system is a PVDF finish applied to the Galvalume® surface to give a long-life color that resists fading and chalking backed by 25 year finish warranty. KXL is a 1 mil nom. PVDF finish with 70% Kynar® 500 or Hylar® 5000 standard.

Varco Pruden Buildings meets the highest standards and certifications in the industry, including IAS and Miami-Dade County, Florida Product Approvals.

Panel Width: 36" coverage  
Panel Length: Min. 1' Max. 48'\*  
Gauges: 26 or 24 ga. available  
Substrate: AZ50 coated  
Exterior Coating: KXL (70% PVDF)  
Interior Coating: Gray primer  
Ext. Coat Warranty: 25 yrs. conditional†  
Finish: Embossed

Available accessories include louvres, walk-doors, wall-lites, and window kits. For information about this or any other VP product or service, contact your local authorized VP Builder.


*Note: All panels formed from light gauge metal may exhibit waviness, also known as "Oil Canning," commonly occurring in, but not restricted to, flat portions of a panel. This inherent characteristic is not a defect of material or manufacturing and is not cause for rejection.*

• Kynar 500® is a registered trademark of Arkema.

• Hylar 5000® is a registered trademark of Solvay Solexis.

\*Some manufacturing facilities have length limitations

† For specific warranty information, refer to VP's Warranty Guide.

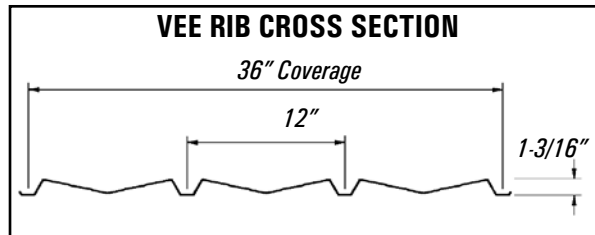

Varco Pruden Buildings, 3200 Players Club Circle, Memphis, TN 38125

©All rights reserved. Varco Pruden Buildings® is a division of BlueScope Buildings North America, Inc. Varco Pruden meets or exceeds the most comprehensive testing and compliance standards in the building system industry. To learn more about our products, services and qualifications, visit our website, [www.vp.com](http://www.vp.com). **Building Solutions... one relationship at a time.**

2058 Vee Rib Wall Panel  
Issue Date: 1999  
Revised: 6/17